
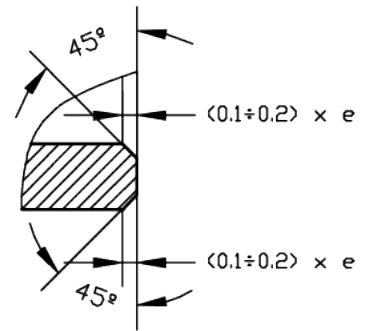


Casquilho HA RC®

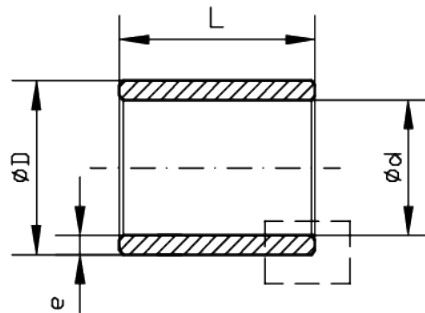

Densidade (g/cm ³)	5,8
Porosidade (%)	18-22
Velocidade Máxima (m/s)	4
Carga Estática Máxima (Kp/cm ²)	500
Dureza (HB)	25
Resistência à Tração (N/mm ²)	70
Alongamento (%)	3
Fator PV (Kp/cm ² .m/s)	13
Temperatura de Funcionamento (°C)	-20 a +100

Ø d (mm)	Ø D (mm)	L (mm)	Ø d (mm)	Ø D (mm)	L (mm)	Ø d (mm)	Ø D (mm)	L (mm)
3	6	4	8	12	20	10	16	20
3	6	10	8	14	8	10	16	25
4	7	7	8	14	12	10	20	24
4	8	4	8	14	16	12	14	12
4	8	12	8	14	20	12	14	15
5	8	8	9	12	10	12	15	12
6	8	14	9	12	14	12	15	16
6	9	6	9	14	14	12	15	20
6	9	10	10	12	10	12	15	25
6	9	12	10	13	10	12	16	12
6	9	16	10	13	12	12	16	15
6	10	6	10	13	16	12	16	16
6	10	10	10	13	20	12	16	20
6	10	12	10	13	25	12	16	25
6	10	16	10	14	10	12	17	12
6	12	6	10	14	14	12	17	16
6	12	10	10	14	15	12	17	20
6	12	12	10	14	16	12	17	25
6	12	16	10	14	20	12	18	12
8	11	8	10	14	25	12	18	20
8	11	12	10	15	10	12	18	25
8	11	16	10	15	16	14	16	15
8	11	20	10	15	20	14	18	14
8	12	8	10	15	25	14	18	18
8	12	12	10	16	10	14	18	22
8	12	16	10	16	16	14	18	28

Casquilho HA RC®

Ø d (mm)	Ø D (mm)	L (mm)	Ø d (mm)	Ø D (mm)	L (mm)	Ø d (mm)	Ø D (mm)	L (mm)
14	20	14	20	28	16	32	38	40
14	20	18	20	28	20	32	38	50
14	20	22	20	28	25	32	40	18
14	20	28	20	28	32	32	40	20
14	22	28	22	25	25	32	40	25
15	17	15	22	27	7	32	40	32
15	17	25	22	27	18	32	40	40
15	19	16	22	27	22	32	40	50
15	19	20	22	27	28	35	44	22
15	19	25	22	27	36	35	44	28
15	19	32	22	28	16	35	44	35
15	21	16	22	28	18	35	45	25
15	21	20	22	28	22	35	45	30
15	21	25	22	28	28	35	45	35
15	21	32	22	28	36	35	45	40
16	20	16	22	29	18	35	45	50
16	20	20	22	29	22	36	42	22
16	20	25	22	29	28	36	42	28
16	20	32	22	29	36	36	42	36
16	22	16	25	28	25	36	42	45
16	22	20	25	30	18	36	45	22
16	22	25	25	30	20	36	45	28
16	22	32	25	30	25	36	45	36
18	20	20	25	30	32	36	45	45
18	22	18	25	30	40	38	44	16
18	22	22	25	32	20	38	44	25
18	22	28	25	32	25	38	44	35
18	22	36	25	32	32	38	44	45
18	24	18	25	32	40	40	46	25
18	24	22	28	32	9	40	46	32
18	24	28	28	32	22	40	46	40
18	24	36	28	32	28	40	46	50
18	25	18	28	32	36	40	50	25
18	25	22	28	32	45	40	50	32
18	25	28	28	33	22	40	50	40
18	25	36	28	33	28	40	50	50
20	23	20	28	33	36	45	50	40
20	24	16	28	33	45	45	51	25
20	24	20	28	36	22	45	51	28
20	24	25	28	36	28	45	51	45
20	24	32	28	36	36	45	51	56
20	25	16	28	36	45	45	55	35
20	25	20	30	34	15	45	55	45
20	25	25	30	34	30	45	55	65
20	26	16	30	35	30	45	56	36
20	26	20	30	36	10	45	56	45
20	26	25	30	38	24	45	56	56
20	26	32	30	38	30	50	56	32
20	27	16	30	38	38	50	56	40
20	27	20	32	38	20	50	56	50
20	27	25	32	38	25	50	56	63
20	27	32	32	38	32	50	60	32

Casquilho HA RC®

Ø d (mm)	Ø D (mm)	L (mm)
50	60	40
50	60	45
50	60	50
50	60	60
50	60	63
55	65	55
60	65	60
60	70	50
60	70	55
60	70	60
60	70	90
60	72	50
60	72	60
60	72	70
60	80	80
63	70	40
63	70	50
75	90	75
80	100	50
80	100	60
80	100	80
80	100	120
100	120	95
100	120	120