


Casquilho C RC®

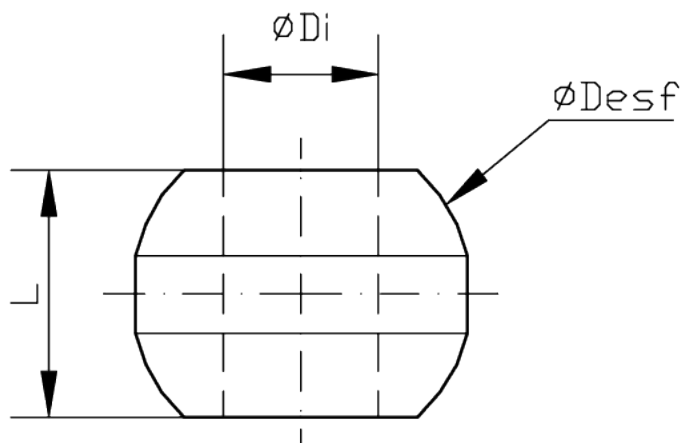

Densidade (g/cm ³)	6,5
Porosidade (%)	18-22
Velocidade Máxima (m/s)	6
Carga Estática Máxima (Kp/cm ²)	200
Dureza (HB)	25
Resistência à Tração (N/mm ²)	80
Alongamento (%)	2
Fator PV (Kp/cm ² .m/s)	18
Temperatura de Funcionamento (°C)	-20 a +100

Ø Di (mm)	Ø Desf (mm)	L (mm)
4	10	8
5	12	9
6	14	11
7	16	12
8	18	13
9	20	14,5
10	22	16
12	20	14
12	23	16